




Commercial Products & Solutions

 [SITE SEARCH](#)
[HOME](#)[PRODUCTS](#)[EDUCATION / RESOURCES](#)[LIGHTING APPLICATIONS](#)
[Where to Buy](#) | [FAQs](#) | [Contact Us](#) | [EliteNet](#)
[Products](#) > [mvr1000/u](#) > 41826**41826 – MVR1000/U**

GE Multi-Vapor® Quartz Metal Halide BT56

**GENERAL CHARACTERISTICS**


Lamp type	High Intensity Discharge - Quartz Metal Halide
Bulb	BT56
Base	Mogul Screw (E39)
Bulb Finish	Clear
Wattage	1000
Rated Life (Hor)	11000 hrs
Rated Life (Vert)	15000 hrs
Bulb Material	Hard glass
Lamp Enclosure Type (LET)	Open Fixture-Restricted Position (S-Rated)



Bulb



Base

[View Larger](#)**PHOTOMETRIC CHARACTERISTICS**

Initial Lumens (Hor)	100280
Initial Lumens (Vert)	108000
Mean Lumens (Hor)	79000
Mean Lumens (Vert)	86000
Color Temperature	4000 K
Color Rendering Index (CRI)	65
Effective Arc Length	3.50000 in (88.900000 mm)

ELECTRICAL CHARACTERISTICS

Burn Position	Universal burning position
Open Circuit Voltage (peak lead ballast) (MIN)	750 V
Open Circuit Voltage (RMS lag ballast) (MIN)	530 V
Warm Up Time to 90% (MIN)	2 min
Warm Up Time to 90% (MAX)	5 min
Hot Restart Time to 90% (MIN)	10 min
Hot Restart Time to 90% (MAX)	15 min

DIMENSIONS

Maximum Overall Length (MOL)	15.3700 in (390.3 mm)
Nominal Length	15.370 in (390.3 mm)

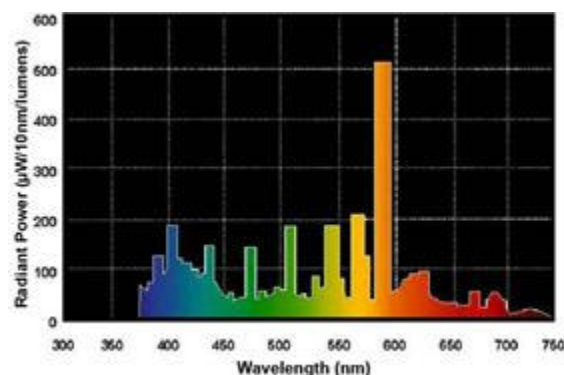
ADDITIONAL RESOURCES[Catalogs](#)[Testimonials](#)**Brochures**

Application/Segment Brochures

- [Canopy Lighting](#)
- [Restaurant Lighting](#)

Product Brochures

- [HID Lamps](#)

[MSDS \(Material Safety Data Sheets\)](#)[Disposal Policies & Recycling Information](#)**GRAPHS & CHARTS****Spectral Power Distribution**

Bulb Diameter (DIA)	7.000 in (177.8 mm)
Light Center Length (LCL)	9.500 in (241.3 mm)

PRODUCT INFORMATION

Product Code	41826
Description	MVR1000/U
ANSI Code	M47
Standard Package	Case
Standard Package GTIN	10043168418260
Standard Package Quantity	6
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	6
UPC	043168418263

COMPATIBLE GE BALLASTS

Product Code	Description	# of Bulbs	Power Factor	Ballast Factor
86650	GEM100048TAC5-5	1	90.0	1.0
87213	GEM1000ML5AA5-5	1	90.0	1.0
86655	GEM1000MLTAA5-5	1	90.0	1.0

⚠ CAUTIONS & WARNINGS

R- WARNING: This lamp can cause serious skin burn and eye inflammation from shortwave ultraviolet radiation if outer envelope of the lamp is broken or punctured, and the arc tube continues to operate. Do not use where people will remain for more than a few minutes unless adequate shielding or other safety precautions are used. Certain types of lamps that will automatically extinguish when the outer envelope is broken or punctured are commercially available. Visit the FDA website for more information:

<http://www.fda.gov/cdrh/radhealth/products/urburns.html>

[See list of cautions & warnings.](#)

[Return To Top](#)

Home | Products | EliteNet | Education/Resources | Lighting Applications | Where to Buy | FAQs | Contact Us | Site Map
 Products for Your Home | Press Room | Corporate | Investor Information | Privacy Policy | Accessibility Statement | Terms of Use

Copyright General Electric Company 1997-2008